

Vivid and Vibrant Colour output with intuitive usability and powerful end-to-end document capability

The imageRUNNER ADVANCE C3500i III series is small in size but big in its ambition to solve your challenges around managing your documents. It is the perfect addition to support and optimise any busy working group's day-to-day workflows.

WORKFLOW EFFICIENCY

- Intuitive touchscreen provides users with smartphone-like usability, making navigation a breeze.
- Single-Pass document feeder option allows effortless, rapid scanning with features like multi-sheet feed detection and skip blank originals.
- My ADVANCE enables a unique, personal experience tailored to meet each user's workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronised across multiple devices for consistency.
- Canon's MEAP platform provides process optimisation, by integrating with a range of powerful document, capture and output management solutions.
- Scalable support for mobile where users can connect directly to the device with Direct Access Point. Capture, scan or print documents easily with the Canon Print Business app.
- Intelligent Recovery wakes device from sleep mode when user is approaching device via motion sensor technology.
- Various finishing functions such as Staple-on-Demand, ECO-Staple, saddle stitch, double/corner stapling and foldings are available as an option.

COST MANAGEMENT

- The ability to apply print policies, monitor output, and restrict usage by user helps reduce unnecessary printing, resulting in lower total document cost.
- Seamless integration with output management solutions, such as uniFLOW or uniFLOW Online Express for detailed tracking, reporting and cost analysis.
- Quality and reliability, combined with remote diagnostics and assistance, can help reduce costs by minimising downtime and time spent by IT.
- Consistent user operation combined with remote and centralised fleet management can help simplify IT management of devices and entire fleets.



SECURITY

- Control who has access to the device with different authentication methods such as picture login, department ID, user authentication and card access.
- Ensure information privacy and security across your network with IPsec, port filtering capabilities, and SSL technology.
- Enhance document confidentiality with encrypted secure print, secure print, secure watermark, encrypted PDF and device signature PDF.
- Ensure device is safe from unknown firmware installation with system verification at startup.
- Integrate with third-party solutions for complete monitoring protection.


QUALITY AND RELIABILITY

- V² (Vivid & Vibrant) imaging technology ensures high quality printouts that impress time after time.
- Supreme transferability of toner and stable reproduction of colours onto a wide range of media, even at large volumes.
- State-of-the-art imaging technologies and toner allow for consistently striking images with 1,200 dpi print resolution.
- Canon's device management tools give you a centralised point of control across your entire fleet, upgrade devices remotely, check device and consumables status and capture meter readings.
- Standard PCL and optional Adobe PostScript®3™ print driver allows seamless integration with enterprise applications.
- Remote diagnostics allow timely, accurate and effective resolution.
- Intuitive user maintenance videos and status notifications available to help achieve maximum uptime and keep supplies replenished.

SUSTAINABILITY

- Fusing technologies and innovative sleep mode features help lower overall energy consumption.
- Minimise paper wastage by holding jobs at the device with Force Hold Print. Choose to preview your print jobs or even change print settings at the device to achieve the desired results at the first time of printing.
- Incorporates sustainable design, with the use of recycled materials and bio-based plastic, and a focus on minimising environmental impact.
- Consumes as little as 0.8W in sleep mode.

MAIN CONFIGURATION OPTIONS

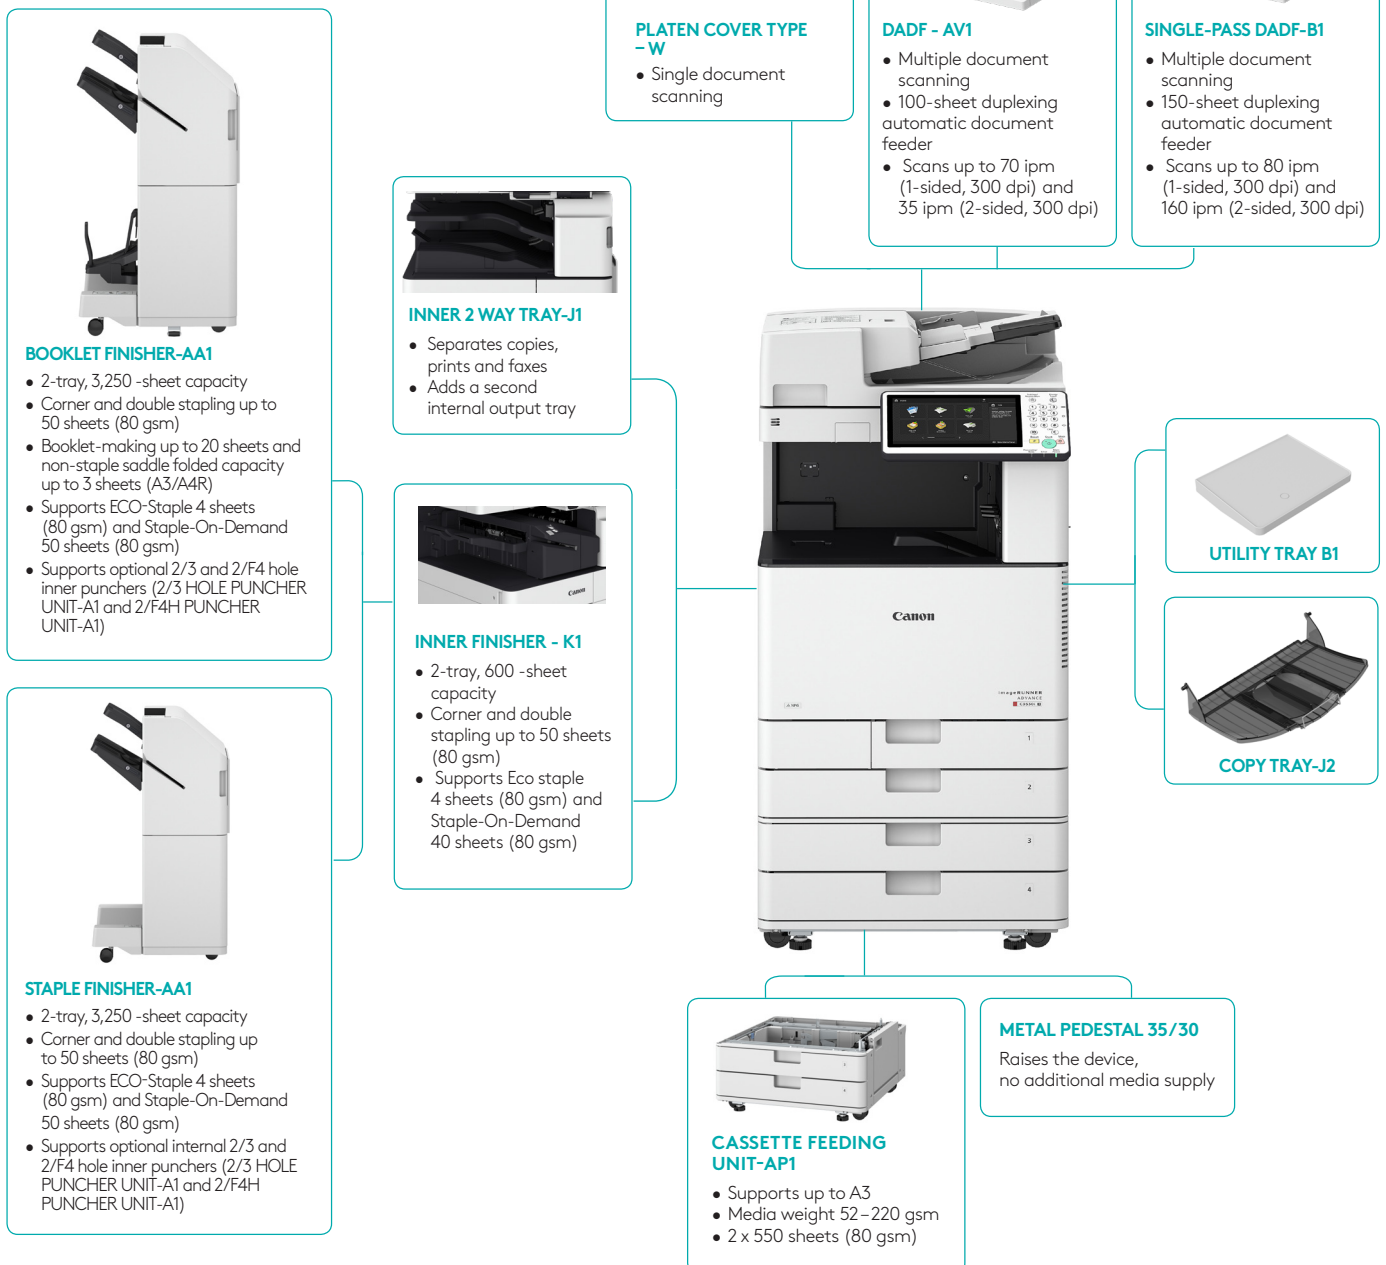

MAIN UNIT

Type
A3 Colour Laser Multifunctional

Core Function
Print, Copy, Scan, Send, Store and Optional Fax

Processor
Canon Dual Custom Processor (Shared)

Control Panel
10.1 inch TFT LCD WSVGA Colour Touch Panel

Memory
Standard : 3.0GB RAM

Hard Disk Drive
Standard : 250GB
Maximum : 1TB

Interface Connection
Network Standard : 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)
Optional : NFC, Bluetooth Low Energy
Others Standard : USB 2.0 x1 (Host), USB 3.0 x1 (Host),
USB 2.0 x1 (Device)
Optional : Serial Interface, Copy Control
Interface

Paper Supply Capacity (A4, 80gsm)
Standard : 1,200 Sheets (2 x 550-sheet cassettes, 100-sheet
multi-purpose tray)
Maximum : 2,300 Sheets (with Cassette Feeding Unit-AP1)

Paper Output Capacity (A4, 80gsm)
Standard : 250 Sheets
Maximum : 3,450 Sheets (with Staple Finisher-AA1 or
Booklet Finisher-AA1 and Copy Tray-J2)

Finishing Capabilities
Standard : Collate, Group
With Inner Finisher-K1: Collate, Group, Offset, Staple,
ECO-Staple, Staple-On-Demand
With Staple Finisher-AA1 or Booklet Finisher-AA1:
Collate, Group, Offset, Staple, Booklet¹, Hole Punch²,
ECO-Staple, Staple-On-Demand
^{*1} Requires Booklet Finisher-AA1 option
^{*2} Requires 2/3H or 2/F4H Hole Puncher Unit-A1 option

Supported Media Types
Paper Cassettes (1/2):
Thin, Plain, Thick, Colour, Recycled, Pre-punched,
Transparency, Bond, Envelope

Multi-Purpose Tray:
Thin, Plain, Thick, Colour, Recycled, Pre-punched,
Transparency, Tracing¹, Label, Bond, Coated, Envelope
^{* Some types of tracing paper cannot be used.}

Supported Media Sizes
Paper Cassette 1:
Standard Size : A4, A5, A5R, A6R, B5
Envelopes : ISO-C5, DL
Custom Size : 139.7 x 182.0 mm to 297.0 x 215.9 mm

Paper Cassette 2:
Standard size : A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,
Foolscap, India Legal, F4A
Envelopes : No.10 (COM10), Monarch, DL
Custom Size : 139.7 x 182.0 mm to 304.8 x 457.2 mm

Paper Cassette 3/4 (Cassette Feeding Unit-AP1):
Standard size : A3, A4, A4R, A5R, B4, B5, B5R
Custom Size : 139.7 x 182.0 mm to 304.8 x 457.2 mm

Multi-Purpose Tray:
Standard size : A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,
SRA3, Foolscap, India Legal, F4A
Envelopes : No.10 (COM10), Monarch, ISO-C5, DL
Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm
Custom size : 98.4 x 139.7 mm to 320.0 x 457.2 mm

Supported Media Weights
Paper Cassettes : 52 to 220 gsm
Multi-Purpose Tray : 52 to 300 gsm
Duplex : 52 to 220 gsm

Warm-up Time
From Power On : 34 Seconds or Less^{*1}
From Deep Sleep Mode : 10 Seconds or Less
Quick Startup Mode : 4 seconds or less^{*2}

^{*1} Time from device power-on until copy ready
^{*2} Time from device power-on to when key operation can be performed
on the touch panel display.

Dimensions (W x D x H)
Standard with platen cover : 565 x 707 x 777 mm
With SP DADF-B1 : 565 x 742 x 900 mm
With DADF-AV1 : 565 x 736 x 880 mm

Installation Space (W x D)
Basic: 978 x 1,123 mm (with SP DADF-B1 + right cover open
+ Multi-purpose tray extension extended + paper
cassette open)
978 x 1,117 mm (with DADF-AV1 + right cover open +
Multi-purpose tray extension extended + Paper
cassette open)
Fully Configured: 1,620 x 1,123 mm (with SP DADF-B1 +
Booklet Finisher-AA1/Staple Finisher-AA1 +
right cover open + Multi-purpose tray
extension extended + paper cassette
open)

1,620 x 1,117 mm (with DADF-AV1 + Booklet
Finisher-AA1/Staple Finisher-AA1 + right
cover open + Multi-purpose tray extension
extended + paper cassette open)

Weight including the toner bottle
Approx. 69 kg including toner (with Platen Cover Type W)
Approx. 81 kg including toner (with SP DADF-B1)
Approx. 75 kg including toner (with DADF-AV1)

Print Specifications

Print Speed (Simplex, BW/CL)
iR-ADV C3530i III up to (ppm) 30 (A4/A5/A5R/A6R)
15 (A3)
25 (A4/A5/A5R/A6R)
15 (A3)
iR-ADV C3525i III up to (ppm) 20 (A4/A4R/A5/A5R/A6R)
15 (A3)

Print Resolution (dpi)
Data processing resolution: 600 x 600, 1,200 x 1,200

Page Description Languages
Standard: UFR II, PCL6
Option: Adobe PS 3

Direct Print
Direct printing available from USB memory, Advanced box,
Remote UI and Web Access¹
Supported File Types: PDF, TIFF, JPEG, EPS, XPS
^{*Only PDF print from websites is supported.}

Printing from Mobile and Cloud
AirPrint, Mopria, Google Cloud Print, Canon Print Business,
and uniFLOW Online

Fonts
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé
Mono WT J/K/S/T¹ (Japanese, Korean, Simplified
and Traditional Chinese), Barcode fonts²
PS fonts: 136 Roman
^{*1} Requires optional PCL International Font Set-A1
^{*2} Requires optional Barcode Printing Kit-D1

Operating System
UFR II: Windows 7/8.1/10/Server 2008/Server 2008 R2/
Server 2012/Server 2012 R2/Server 2016, MAC OS X
(10.9 or later)
PCL: Windows 7/8.1/10/Server 2008/Server 2008 R2/
Server 2012/Server 2012 R2/Server 2016
PS: Windows 7/8.1/10/Server 2008/Server 2008 R2/
Server 2012/Server 2012 R2/Server 2016, MAC OS X
(10.9 or later)
PPD: MAC OS X (10.3.9 or later), Windows 7/8.1/10

Copy Specifications

Copy Speed (Simplex, BW/CL)
iR-ADV C3530i III up to (ppm) 30 (A4/A5/A5R/A6R)
15 (A3)
25 (A4/A5/A5R/A6R)
15 (A3)
iR-ADV C3525i III up to (ppm) 20 (A4/A4R/A5/A5R/A6R)
15 (A3)

Copy Resolution (dpi)
Reading : 600 x 600
Printing : Up to 2,400 equivalent x 600

Multiple Copies
Up to 999 copies

Copy Exposure
Automatic or Manual (9 Levels)

Magnification
25% - 400% (1% Increments)

Preset Reductions
25%, 50%, 61%, 70%, 81%, 86%

Preset Enlargements
115%, 122%, 141%, 200%, 400%

Scan Specifications

Type
Standard: Color Flatbed Scan Unit
Optional: Platen cover, Single-pass Duplexing Automatic
Document Feeder (SP DADF-B1) or Duplexing
Automatic Document Feeder (DADF-AV1)
[2-sided to 2-sided (Automatic with DADF)]

Document Feeder Paper Capacity (80gsm)
SP DADF-B1: 150 Sheets
DADF-AV1: 100 Sheets

Acceptable originals and weights
Platen: Sheet, Book, 3-Dimensional Objects
(Height: Up to 50 mm, Weight: up to 2kg)
Document Feeder media weight (BW/CL):
SP DADF-B1:
1-sided scanning: 38 to 157 gsm/64 to 157 gsm
2-sided scanning: 50 to 157 gsm/64 to 157 gsm
DADF-AV1:
1-sided scanning: 38 to 128 gsm/64 to 128 gsm
2-sided scanning: 50 to 128 gsm/64 to 128 gsm

Supported Media Sizes
Platen: max. scanning size: 297.0 x 431.8 mm
Document Feeder media size:
SP DADF-B1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R,
Custom size: 128.0 x 139.7 mm to 304.8 x 431.8 mm
DADF-AV1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6,
Custom size: 139.7 x 128 mm to 297 x 431.8 mm

Scan Speed (A4, BW/CL)
SP DADF-B1:
1-sided Scanning (ipm): 80/80 (300dpi), 51/51 (600 dpi)
2-sided Scanning (ipm): 160/160 (300dpi), 51/51 (600 dpi)

DADF-AV1:
1-sided Scanning (ipm): 70/70 (300dpi), 51/51 (600 dpi)
2-sided Scanning (ipm): 35/35 (300dpi), 25.5/25.5 (600 dpi)

Scan Resolution (dpi)
600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Pull Scan Specifications
Colour Network ScanGear2. For both TWAIN and WIA
Supported OS: Windows 7/8.1/10/Server 2008/Server 2008
R2/Server 2012/Server 2012 R2/Server 2016

Send Specifications

Destination
E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV,
Mail Box, Super G3 FAX (Optional), IP Fax (Optional)

Address Book
LDAP (2,000)/Local (1,600)/One-touch (200)

Send Resolution (dpi)
600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Communication Protocol
File : FTP (TCP/IP), SMB v3.0, WebDAV
E-mail/I-Fax : SMTP, POP3

File Format
Standard : TIFF, JPEG, PDF (Compact, Apply policy,
Optimize for Web, PDF A/1-b, Encrypted,
Device Signature), XPS (Compact, Device
Signature)
Optional : PDF (Trace & Smooth, Searchable, User
Signature), XPS (Searchable, User Signature),
Office Open XML (PowerPoint, Word)

Fax Specifications

Optional/Standard Optional on all models

Maximum Number of Connection Lines 2

Modem Speed Super G3 : 33.6 kbps
G3 : 14.4 kbps

Compression Method MH, MR, MMR, JBIG

Resolution (dpi) 400 x 400, 200 x 400,
200 x 200, 200 x 100

Sending/Recording Size A3, A4, A4R, A5¹, A5R¹, B4,
B5², B5R¹
^{*1} Sent as A4 ^{*2} Sent as B4

FAX Memory Up to 30,000 pages

Speed Dials Max. 200

Group Dials/Destinations Max. 199 dials

Sequential Broadcast Max. 256 addresses

Memory Backup Yes

Store Specifications

Mail Box Simple (Number supported)
100 User Inboxes, 1 Memory RX Inbox,
50 Confidential Fax Inboxes
30,000 Maximum Pages Stored

Advanced Box
Communication Protocol: SMB or WebDAV
Supported Client PC: Windows (Windows 7/8/8.1/10)
Concurrent Connections (Max.): SMB: 64, WebDAV: 3
(Active Sessions)

Advanced Box Available Disc Space
Approx. 16GB (Standard HDD)
Approx. 480GB (with option 1TB HDD)

Memory Media
Standard: USB Memory

Security Specifications

Authentication
Standard : User Authentication (Picture Login/Keyboard
Authentication), Department ID Authentication,
Access Management System

Optional: My Print Anywhere secure print (Requires
uniFLOW), uniFLOW Online Express Cloud based
management software

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated)

Optional: Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW, iWSAM Express)

Network

Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME

Document

Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signature, Secure Watermarks

Optional: User signature, Document Scan Lock

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (Relative Humidity)

Power Requirements

220-240V (±10 %), 50/60Hz (±2 Hz), 4.0Amp

Power Consumption

Maximum: 1,500 W
Standby: Approx. 38.8 W^{*1}
Sleep mode: Approx. 0.8 W^{*2}

*1 Reference Value

*2 0.8W sleep mode is not available in all circumstances due to certain settings.

Consumables

Toner NPG-67L TONER C/M/Y
NPG-67 TONER BK/C/M/Y

Toner Yield (Estimated Yield @5% Coverage)

NPG-67 TONER BK : 36,000 pages
NPG-67 TONER C/M/Y : 19,000 pages
NPG-67L TONER C/M/Y : 2,500 pages

Software and Printer Management

Tracking and Reporting

Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device.

uniFLOW Online Express: Combining with ULM you can gain further control, highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location.

Remote management tools

iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring of consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)

eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)

Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control.

Scanning software

Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device.

Optimisation Tools

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers

NetSpot Device Installer: Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.

Platform

MEAP (Multifunctional Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device.

MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services

Paper Supply Options

CASSETTE FEEDING UNIT-API

Paper Capacity : 550 sheets x 2 (1,100 sheets, 80 gsm)

Paper Type : Thin, Plain, Recycled, Thick, Colour, Transparency, Bond, Pre-punched

Paper Size : A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R

Custom size : 139.7 mm x 182.0 mm to

304.8 x 457.2 mm

Paper Weight : 52 to 220 gsm

Power Source : From the Main Unit

Dimensions : (WxDxH) 565 x 615 x 248 mm

Weight : Approx. 16 kg

Hardware Accessories

Card Readers

IC CARD READER BOX-C1
COPY CARD READER-F1 IC CARD READER ATTACHMENT-A1
COPY CARD READER ATTACHMENT-B5

Others

PLATEN COVER TYPE W
UTILITY TRAY-B1
3 WAY UNIT-D1
FL CASSETTE-BE1
FL CASSETTE-BF1

Security Options

Document Security

DOCUMENT SCAN LOCK KIT-B2

Data Security

2.5INCH/1TB HDD-P1
REMOVABLE HDD KIT-AK2

System and Controller Options

Print Accessories

PCL INTERNATIONAL FONT SET-A1
PCL ASIAN FONT SET-A1 PCL ASIAN FONT SET-A1
PS PRINTER KIT-BR1

Send Option

UNIVERSAL SEND ADVANCED FEATURE SET-H1
(TRACE & SMOOTH PDF, SEARCHABLE PDF/XPS, OFFICE OPEN XML)
UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1

System Accessories

SERIAL INTERFACE KIT-K3
COPY CONTROL INTERFACE KIT-A1
BLE CONNECTION KIT-A1
NFC KIT-C1

Fax Accessories

SUPER G3 FAX BOARD-AZ1
SUPER G3 2ND LINE FAX BOARD-AU1
REMOTE FAX KIT-A1
IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories

ADF ACCESS HANDLE-A1
VOICE GUIDANCE KIT-G1
VOICE OPERATION KIT-D1

Consumables

STAPLE-P1
STAPLE CARTRIDGE-Y1



To arrange for a demonstration, simply contact any of our offices below.

SOUTH & SOUTHEAST ASIA

REGIONAL HEADQUARTERS

Canon Singapore Pte. Ltd. | 1 Fusionopolis Place #15-01 Galaxis Singapore 138522

Tel: 65-6799 8888 | Fax: 65-799-8882 | www.canon-asia.com | www.canon.com.sg



V² COLOUR



Partner / Dealer Stamp

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document.

Canon, imageRUNNER, imageRUNNER ADVANCE, imageCHIP, RAPID Fusing System, MEAP, eMaintenance, iW, Business can be simple and get Smart get genuine are trademarks of Canon Inc. and/or its affiliates. "MEAP" is a trademark of CANON Inc., referring to an "application platform" for Canon multifunction and single function printers. Other names may be the trademarks of their respective owners. uniFLOW, eCopy and Therefore are independent party software distributed by Canon Singapore Pte Ltd.

Adobe, PostScript, PostScript 3 and the PostScript logo are trademarks of Adobe Systems Incorporated

0216W116 © 2019 Canon Singapore Pte. Ltd.
All rights reserved. Printed in Singapore.